



## PRODUCT SPECIFICATION

The LPC series is designed for general purpose lighting in high abuse environments. For a surface mount conduit fixture of similar design, see our LPS series.

### Mounting

Surface mounts to ceiling or walls.

### Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens completely encloses the back-plate.

### Backplate

16 gauge cold rolled steel die formed to shape with seams welded and ground smooth.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

### Hardware

Stainless steel, tamper-proof fasteners.

### Certifications

UL Listed damp location. Covered ceilings only.







Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

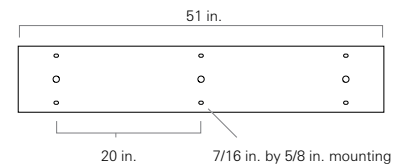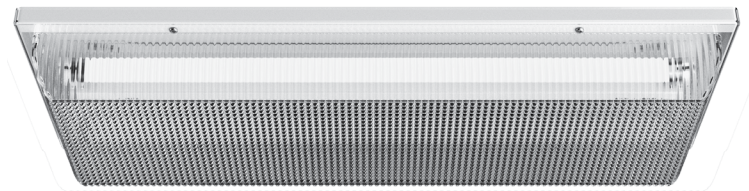

### LPC

#### one Lamps (not included)

|    |                       |
|----|-----------------------|
| 14 | 2 ft. 14 W T5         |
| 17 | 2 ft. 17 W T8         |
| 24 | 2 ft. 24 W T5 HO      |
| 4B | 2 ft. 40 W T5 RS Biax |
| 28 | 4 ft. 28 W T5         |
| 32 | 4 ft. 32 W T8         |
| 54 | 4 ft. 54 W T5 HO      |

#### two Lamp Quantity

|   |       |
|---|-------|
| 2 | Two   |
| 3 | Three |

#### three Voltage

|     |                              |
|-----|------------------------------|
| 120 | 120 V, 60 Hz                 |
| 277 | 277 V, 60 Hz                 |
| 347 | 347 V, 60 Hz                 |
| VAR | Variable, 120-277 V, 50/60Hz |

#### four Ballast

|    |                                               |
|----|-----------------------------------------------|
| DM | Dimming                                       |
| EL | Electronic Instant Start, <u>std T8</u>       |
| PR | Program Rapid Start, <u>std T5, option T8</u> |

#### five Fasteners

|    |                                     |
|----|-------------------------------------|
| AP | Stainless steel allen head with pin |
| TP | Stainless steel torx head with pin  |
| PH | Phillips, non-security              |

#### six Electrical Access

|   |                                                 |
|---|-------------------------------------------------|
| A | 2.250 in. diameter access hole                  |
| K | 0.875 in. diameter knockout(s), <u>standard</u> |

#### seven UL Listing

|   |              |
|---|--------------|
| W | Wet location |
|---|--------------|

#### eight Options

|        |                                        |
|--------|----------------------------------------|
| 2C     | Two-circuit wired                      |
| AM     | Anti-microbial coating (exposed areas) |
| CU     | Canadian UL Listing                    |
| E1     | One lamp emergency ballast             |
| E2     | Two lamp emergency ballast             |
| FH     | Fuse and holder                        |
| NL     | Night light, for 7 or 9 W PL bipin     |
| NL-LED | Night light, LED                       |
| VS     | V-shaped reflector                     |