



High Abuse Recessed Mount **LED** Step or Wall

PRODUCT SPECIFICATION

Surface Lighting

STP Series

The STP-LED series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth.

Door

16 gauge one piece, die formed cold rolled steel.
Aluminum and 304 stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Driver

(4W) 0-10VDC dimming

Wiring

All electrical components are mounted to a removable wireway for easy wiring.


Certifications

UL Listed damp location.


Applications

- Wall Illumination
- Step Illumination


Louvered door option

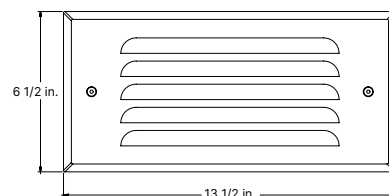

Opal lens option



Amber lens option

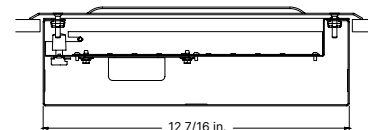

one two three four five six seven eight

STP - VAR DM - - -

one	LED	four	Voltage	eight	Options
W	White, <u>4000K only</u>	VAR	Variable, 120-277 V, 50/60Hz	AM	Anti-microbial coating (exposed areas)
R	Red			CU	Canadian UL Listing
A	Amber	five	Driver	LD	Louvered door
		DM	(4W) 0-10Vdc Dimming, <u>standard</u>		
two	Door Material	six	Lens		
A	Aluminum	00	none, <u>only with louvered door option</u>		
C	Cold rolled steel	12	.125 in. K12 prismatic polycarbonate		
S	304 Stainless steel	53	.125 in. K12 prismatic acrylic		
		122	Optic Plus LED diffusing acrylic lens		
three	Door Finish	130	.118 Opal polycarbonate		
R	Brushed (Stainless steel only)				
W	White	seven	Fasteners		
		AP	Stainless steel allen head with pin		
		TP	Stainless steel torx head with pin		
		PH	Phillips, non-security		

Modifications are available to meet custom requirements.
Specifications and dimensions are subject to change without notice.